



GDT >2R - 8*6 series

Features


- ✧ Provide ultra-fast response to surge voltage from slow-rising surge of 100V/s to rapid-rising surge of 1KV/μs.
- ✧ Stable breakdown voltage.
- ✧ High insulation resistance.
- ✧ Low capacitance (≤1.5pF).
- ✧ High holdover voltage.
- ✧ Large absorbing transient current capability.
- ✧ Micro-Gap Design
- ✧ Size : 8*6mm
- ✧ Storage and operational temperature: -40°C ~ +85°C
- ✧ Meets MSL level 1, per J -STD-020



Application

- ✧ Repeaters, Modems.
- ✧ Telephone Interface, Line cards.
- ✧ Data communication equipment.
- ✧ Line test equipment.

Part Number Code

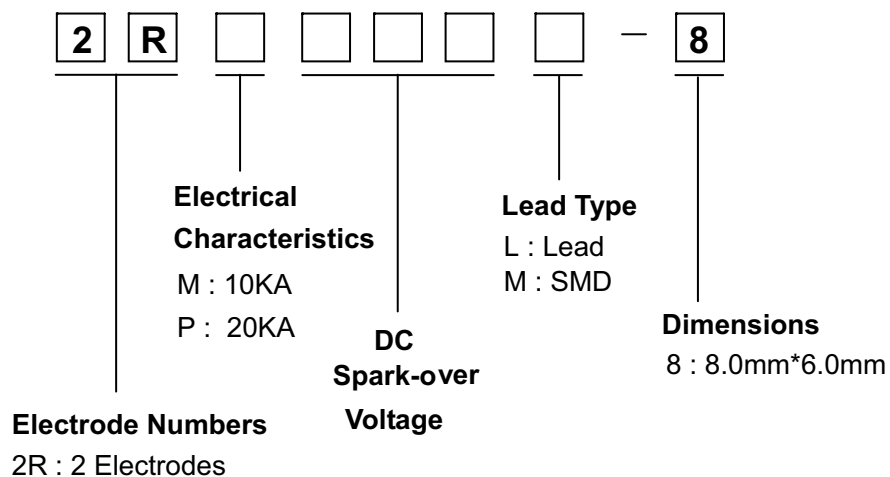




GDT >2R - 8*6 series

Dimensions

unit :mm

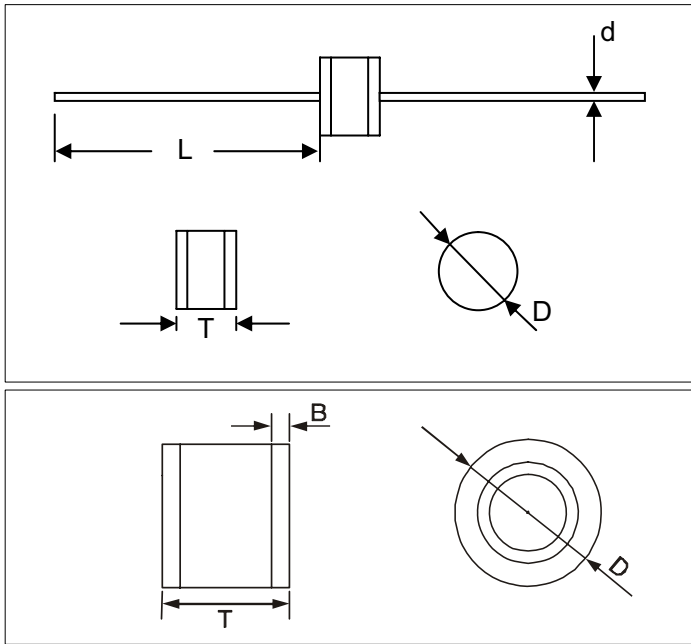

Items	Dimension	
	Spec.	Tolerance
D	8.0	+0.3,-0.5
T	6.0	+0.3,-0.5
d	0.8	±0.05
L	30.0	Max.
D	8.0	+0.3,-0.5
T	6.0	+0.3,-0.5
B	1.1	±0.4

Electrical Characteristic

Part Number		DC Spark-over Voltage	Maximum Impulse Spark-over Voltage	Nominal Impulse Discharge Current	Alternating Discharge Current	Impulse Life	Minimum Insulation Resistance		Maximum Capacitance
		100V/s	1000V/μs	8/20μs, 10times	50Hz, 1sec	10/1000μs, 100A	Test Voltage	(GΩ)	1MHz
		(V)	(V)	(KA)	(A)	(times)	DC(V)		(pF)
2RM075L-8	2RM075M-8	75±20%	600	10	10	500	25	1.0	1.5
2RM090L-8	2RM090M-8	90±20%	600	10	10	500	50	1.0	1.5
2RM145L-8	2RM145M-8	145±20%	700	10	10	500	100	1.0	1.5
2RM150L-8	2RM150M-8	150±20%	700	10	10	500	100	1.0	1.5
2RM230L-8	2RM230M-8	230±20%	700	10	10	500	100	1.0	1.5
2RM250L-8	2RM250M-8	250±20%	800	10	10	500	100	1.0	1.5
2RM300L-8	2RM300M-8	300±20%	900	10	10	500	100	1.0	1.5
2RM350L-8	2RM350M-8	350±20%	900	10	10	500	100	1.0	1.5
2RM400L-8	2RM400M-8	400±20%	1000	10	10	500	100	1.0	1.5
2RM470L-8	2RM470M-8	470±20%	1100	10	10	500	250	1.0	1.5
2RM600L-8	2RM600M-8	600±20%	1300	10	10	500	250	1.0	1.5
2RM800L-8	2RM800M-8	800±20%	1500	10	10	500	250	1.0	1.5



GDT >2R - 8*6 series


Electrical Characteristic

Part Number		DC Spark-over Voltage	Maximum Impulse Spark-over Voltage	Nominal Impulse Discharge Current	Alternating Discharge Current	Impulse Life	Minimum Insulation Resistance		Maximum Capacitance
		100V/s	1000V/ μ s	8/20 μ s, 10times	50Hz, 1sec	10/1000 μ s, 100A	Test Voltage	(G Ω)	1MHz
		(V)	(V)	(KA)	(A)	(times)	DC(V)		(pF)
2RP075L-8	2RP075M-8	75 \pm 20%	600	20	20	500	25	1.0	1.5
2RP090L-8	2RP090M-8	90 \pm 20%	600	20	20	500	50	1.0	1.5
2RP145L-8	2RP145M-8	145 \pm 20%	700	20	20	500	100	1.0	1.5
2RP150L-8	2RP150M-8	150 \pm 20%	700	20	20	500	100	1.0	1.5
2RP230L-8	2RP230M-8	230 \pm 20%	700	20	20	500	100	1.0	1.5
2RP250L-8	2RP250M-8	250 \pm 20%	800	20	20	500	100	1.0	1.5
2RP300L-8	2RP300M-8	300 \pm 20%	900	20	20	500	100	1.0	1.5
2RP350L-8	2RP350M-8	350 \pm 20%	900	20	20	500	100	1.0	1.5
2RP400L-8	2RP400M-8	400 \pm 20%	1000	20	20	500	100	1.0	1.5
2RP470L-8	2RP470M-8	470 \pm 20%	1100	20	20	500	250	1.0	1.5
2RP600L-8	2RP600M-8	600 \pm 20%	1300	20	20	500	250	1.0	1.5
2RP800L-8	2RP800M-8	800 \pm 20%	1500	20	20	500	250	1.0	1.5



GDT >2R - 8*6 series

Electrical Rating

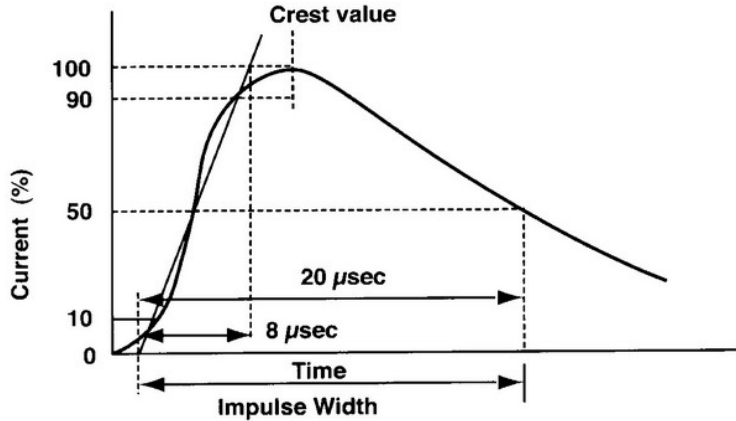Item	Test Condition / Description	Requirement
DC Spark-over Voltage	The voltage is measured with a low rate of rise $dv / dt=100V/s$	To meet the specified value
Maximum Impulse Spark-over Voltage	The maximum impulse breakdown voltage is measured with a rise time of $dv / dt=1000V/\mu s$	
Impulse Discharge Current	<p>The maximum current applying a waveform of 8/20μs that can be applied across the terminals of the gas tube without causing the gas tube to change more than $\pm 25\%$ from its initial measured DC breakdown voltage. Dwell time between pulses is 3 minutes.</p> 	
Alternating Discharge Current	Rated RMS value of AC current at 50Hz, 1 sec. 10 times. Intervals: 3min. DC breakdown voltage may not change more than $\pm 25\%$ from its initial measured DC breakdown voltage. $IR > 10^8$ ohms (-20%, +30% for 70 – 90V).	
Insulation Resistance	The resistance of gas tube shall be measured each terminal each other terminal. please see above spec	
Capacitance	The capacitance of gas tube shall be measured each terminal to each other terminal. Test frequency :1MHz	