




Axial Leaded - 15000W > 15KPA17~280CA Series

The 15KPA Series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

Features

- Halogen-free
- Rohs compliant
- Typical maximum temperature coefficient $\Delta V_{BR} = 0.1\% \times V_{BR@25^{\circ}C} \times \Delta T$
- Glass passivated Chip junction in P600 package
- 5000W peak pulse capadility at $10 \times 1000\mu s$ waveform, repetition rate(duty cycles):0.01%
- Fast response time:typically less than 1.0ps from 0 Volts to BV min
- Excellent clamping capability
- Low incremental surge resistance
- Typical I_R less than $5\mu A$ above 12V
- High temperature soldering guaranteed: $260^{\circ}C/40$ seconds / $0.375''$, (9.5mm) lead length, 5lbs., (2.3kg) tension
- Plastic package has underwriters laboratory flammability classification 94v-0

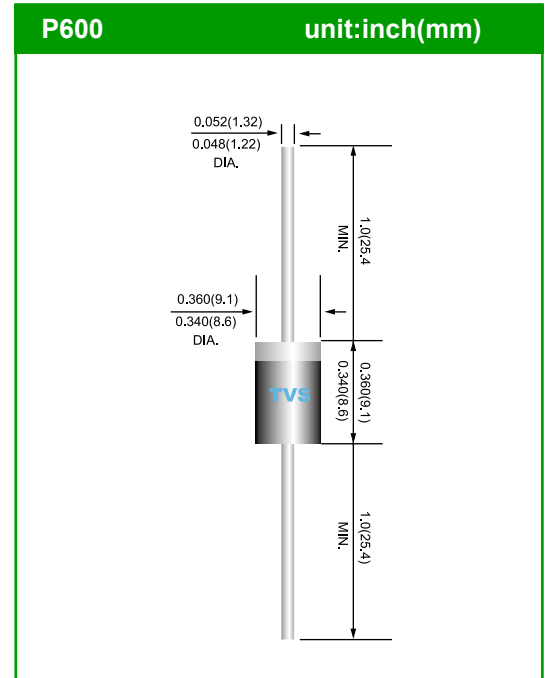

Applications

TVS devices are ideal for the protection of I/O interfaces, V_{CC} bus and other vulnerable circuits used in telecom, computer, industrial and consumer electronic applications.

Maximum Ratings And Characteristics (TA=25°C unless otherwise noted)

Rating	Symbol	Value	Units
Peak Pulse Power Dissipation by $10 \times 1000\mu s$ test waveform (Fig.1)(Note 1)	P_{PPM}	15000	Watts
Steady State Power Dissipation on infinite heat sink at $T_L=75^{\circ}C$ (Fig. 5)	P_D	8	Watts
Peak Forward Surge Current, 8.3ms Single Half Sine Wave Unidirectional only (Note 2)	I_{FSM}	400	Amps
Maximum Instantaneous Forward Voltage at 25A for Unidirectional only (Note 3)	V_F	3.5/5.0	V
Operating junction and Storage Temperature Range.	T_J, T_{STG}	-55 to 175	$^{\circ}C$
Typical Thermal Resistance Junction to Lead	R_{uL}	8.0	$^{\circ}C/W$
Typical Thermal Resistance Junction to Ambient	R_{uJA}	40	$^{\circ}C/W$


Notes:

1. Non-repetitive current pulse , per Fig. 3 and derated above $T_A = 25^{\circ}C$ per Fig. 2.
2. Measured on 8.3ms single half sine wave or equivalent square wave, duty cycle=4 per minute maximum.



Axial Leaded - 15000W > 15KPA17~280CA Series

Dimensions

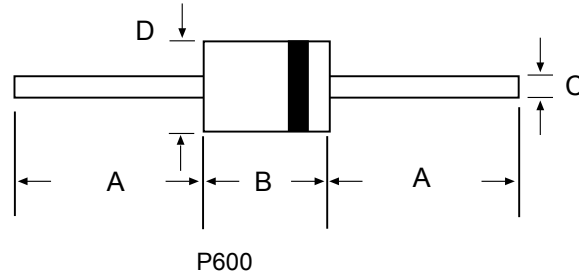

Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	1.000	-	25.40	-
B	0.340	0.360	8.60	9.10
C	0.048	0.052	1.22	1.32
D	0.340	0.360	8.60	9.10

Electrical Characteristics

Part Number		Reverse Stand-Off Voltage	Breakdown Voltage NIN.@I _T	Test Current	Maximum Clamping Voltage @I _{PP}	Peak Pulse Current	Reverse Leakage @V _{RWM}
UNT-POLAR	BI-POLAR	V _{RWM} (V)	V _{BR MIN.} (V)	I _T (mA)	V _C (V)	I _{PP} (A)	I _R (μA)
15KPA17A	15KPA17CA	17.0	18.99	50	29.3	515.4	5000
15KPA18A	15KPA18CA	18.0	20.11	50	30.9	488.7	5000
15KPA20A	15KPA20CA	20.0	22.34	20	34.3	440.2	1500
15KPA22A	15KPA22CA	22.0	24.57	10	37.1	407.0	500
15KPA24A	15KPA24CA	24.0	26.81	5	40.7	371.0	150
15KPA26A	15KPA26CA	26.0	29.04	5	44.0	343.2	50
15KPA28A	15KPA28CA	28.0	31.28	5	47.5	317.9	25
15KPA30A	15KPA30CA	30.0	33.51	5	50.7	297.8	15
15KPA33A	15KPA33CA	33.0	36.90	5	54.7	276.1	2
15KPA36A	15KPA36CA	36.0	40.20	5	59.8	252.5	2
15KPA40A	15KPA40CA	40.0	44.70	5	65.8	229.5	2



Axial Leaded - 15000W > 15KPA17~280CA Series

Electrical Characteristics

Part Number		Reverse Stand-Off Voltage	Breakdown Voltage V_{BR} @ I_T	Test Current	Maximum Clamping Voltage @ I_{PP}	Peak Pulse Current	Reverse Leakage @ V_{RWM}
UNT-POLAR	BI-POLAR	$V_{RWM}(V)$	$V_{BR MIN.}(V)$	$I_T(mA)$	$V_C(V)$	$I_{PP}(A)$	$I_R(\mu A)$
15KPA43A	15KPA43CA	43.0	48.00	5	69.8	216.3	2
15KPA45A	15KPA45CA	45.0	50.30	5	72.8	207.4	2
15KPA48A	15KPA48CA	48.0	53.60	5	77.7	194.3	2
15KPA51A	15KPA51CA	51.0	57.00	5	82.9	182.1	2
15KPA54A	15KPA54CA	54.0	60.30	5	87.7	172.2	2
15KPA58A	15KPA58CA	58.0	64.80	5	93.8	161.0	2
15KPA60A	15KPA60CA	60.0	67.00	5	97.4	155.0	2
15KPA64A	15KPA64CA	64.0	71.50	5	104.2	144.9	2
15KPA70A	15KPA70CA	70.0	78.20	5	113.6	132.9	2
15KPA75A	15KPA75CA	75.0	83.80	5	122.0	123.8	2
15KPA78A	15KPA78CA	78.0	87.10	5	126.1	119.7	2
15KPA85A	15KPA85CA	85.0	94.90	5	137.6	109.7	2
15KPA90A	15KPA90CA	90.0	100.50	5	145.6	103.7	2
15KPA100A	15KPA100CA	100.0	111.70	5	161.3	93.6	2
15KPA110A	15KPA110CA	110.0	122.90	5	178.6	84.5	2
15KPA120A	15KPA120CA	120.0	134.00	5	192.3	78.5	2
15KPA130A	15KPA130CA	130.0	145.20	5	208.3	72.5	2
15KPA150A	15KPA150CA	150.0	167.60	5	241.9	62.4	2
15KPA160A	15KPA160CA	160.0	178.70	5	258.6	58.4	2
15KPA170A	15KPA170CA	170.0	189.90	5	272.7	55.4	2
15KPA180A	15KPA180CA	180.0	201.10	5	288.5	52.3	2
15KPA200A	15KPA200CA	200.0	223.40	5	319.1	47.3	2
15KPA220A	15KPA220CA	220.0	245.70	5	352.5	42.8	2
15KPA240A	15KPA240CA	240.0	268.10	5	384.6	39.3	2
15KPA260A	15KPA260CA	260.0	290.40	5	416.7	36.2	2
15KPA280A	15KPA280CA	280.0	312.80	5	454.5	33.2	2

For parts without A, the V_{BR} is $\pm 10\%$ and V_C is 5% higher than with A parts
 For bidirectional type having V_R of 10 volts and less, the I_R limit is double.



Axial Leaded - 15000W > 15KPA17~280CA Series

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1 - Peak Pulse Power Rating Curve

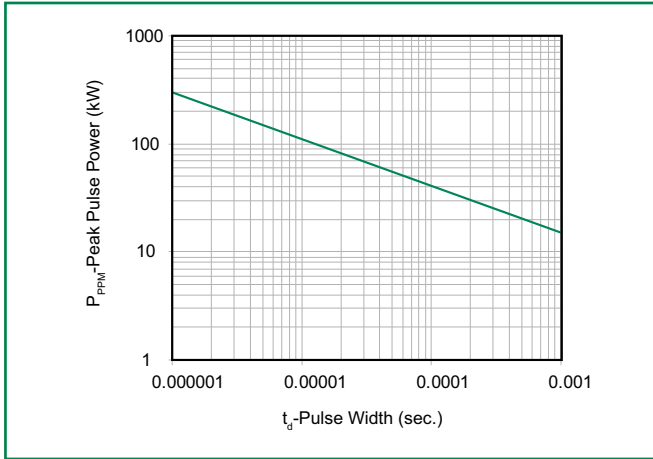


Figure 2 - Pulse Derating Curve

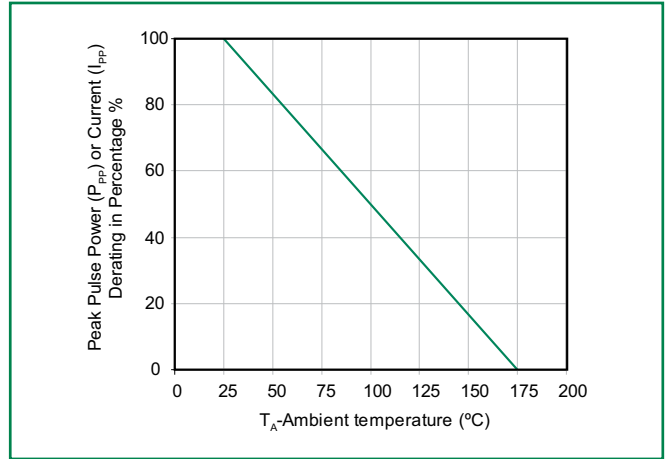


Figure 3 - Test Pulse Waveform

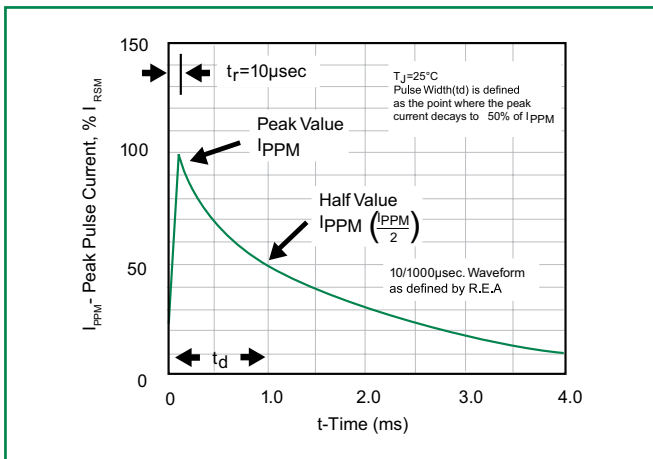


Figure 4 - Typical Junction Capacitance

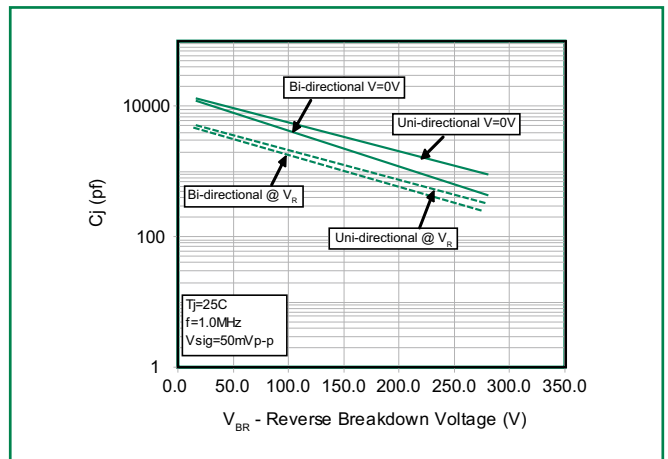


Figure 5 - Steady State Power Derating Curve


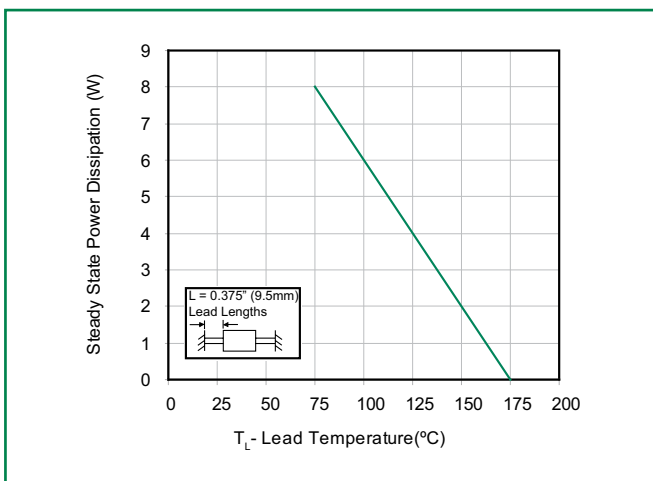


Figure 6 - Maximum Non-Repetitive Forward Surge Current




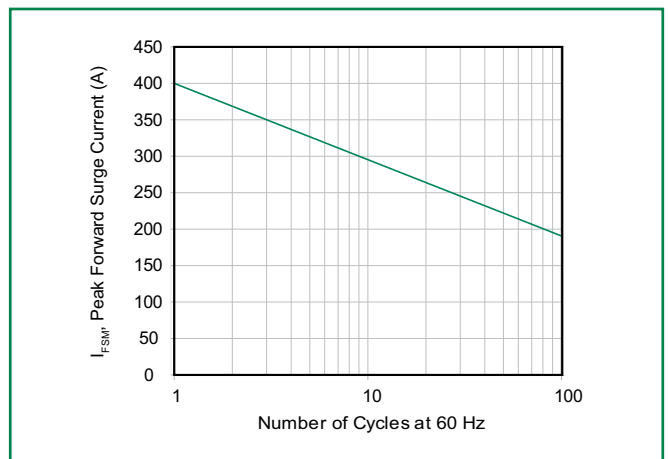

Axial Leaded - 15000W > 15KPA17~280CA Series

Soldering Parameters

Reflow Condition		Lead-free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Time (min to max) (t_s)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		280°C

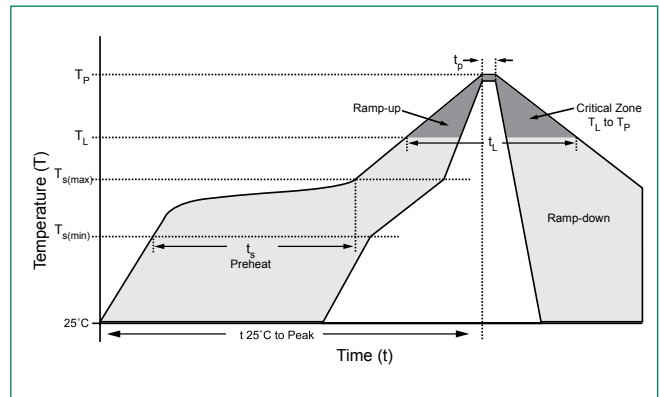

Flow/Wave Soldering (Solder Dipping)

Peak Temperature :	265°C
Dipping Time :	10 seconds
Soldering :	1 time


Physical Specifications

Weight	0.045oz., 1.2g
Case	JEDEC DO-201 molded plastic body over passivated junction.
Polarity	Color band denotes the cathode except Bipolar.
Terminal	Matte Tin axial leads, solderable per JESD22-B102D.

Environmental Specifications

Temperature Cycle	JESD22-A104
Pressure Cooker	JESD 22-A102
High Temp. Storage	JESD22-A103
HTRB	JESD22-A108
Thermal Shock	JESD22-A106

Part Numbering System

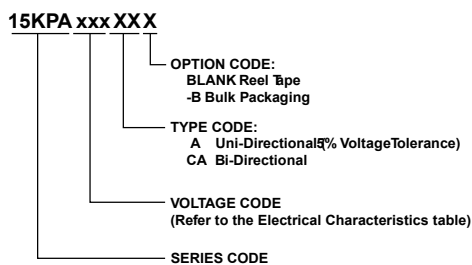

Part Marking System

