



## Surface Mount >-LDM302-141N~701M Series

### Applicable

#### For Power Supplies(LDM302 or LDM102 Series)

- Standard power supplies requisite by US UL1449.
- Highly reliable power supplies.
- Three or two phases industrial or civic machinery equipment power.
- Power supplies for IC or electronic circuits.
- Surge compressor for switch and relay.

#### For Data Communication Equipment(LDM302,LDM102 or LDM501 Series)

- Standard protection required by US UL497A and UL497B.
- Programmable switch machine.
- Telephone
- Fax
- Modem

#### Equipment with Antenna or Antenna/Signal Circuits including mobile equipment(LDM102 or LDM501Series)

- Standard protection required by US UL1414.
- Satellite Antenna
- Amplifier
- Cassette
- Radio
- Alarm and sensor

#### Equipment where Anti-static is Required(LDM102 or LDM501 Series)


- Display including TV.
- Monitor
- Environment where dusty and flammable material are presented.

#### All kinds of Medical equipment and devices(LDM302,RLM102 or LDM501 Series)

### Features

- Compared with other surge absorbers having similar functions BLSA has the fast response speed ,largest withstand current and voltage but smallest size.
- Zero leaking current before clamping voltage.
- All electrical characteristics are very stable even after long period of charge and discharge. There is no need for inspection and exchange periodically.
- Superior capability to withstand repeated lightning strikes.
- Stable and very Small electrostatic capacitance (<0.8pf) and great isolation (>100MΩ).
- No pollution material.
- Bilateral and symmetrical.
- Completely insensitive to weather, temperature, humidity and lightness.


### Product Name

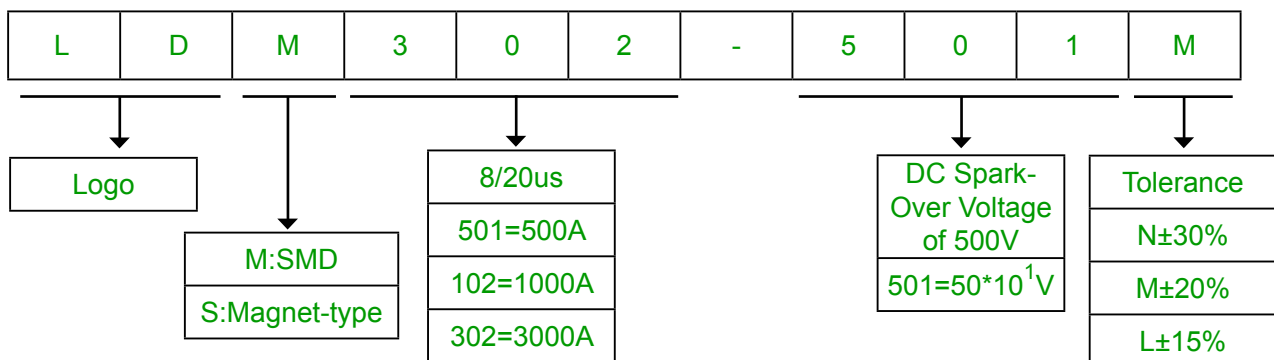



## Surface Mount >-LDM302-141N~701M Series

### Electrical Characteristics

| Type Number | DC Spark-Over Voltage | Minimum Insulation Resistance |                   | Maximum Capacitance (1KHz-6Vmax.) | Surge Current Capacity (8/20μs) | Surge Life Test            | Package Dimensions (mm)   |
|-------------|-----------------------|-------------------------------|-------------------|-----------------------------------|---------------------------------|----------------------------|---|
|             | V <sub>s</sub>        | Test Voltage                  | I <sub>rchm</sub> | C <sub>j</sub>                    |                                 |                            |   |
|             | V                     | V                             | MΩ                | pF                                |                                 |                            |   |
| LDM302-141N | 140±30%               | 50                            | 100               | 0.8                               | 10KV/>3000A                     | 10KV<br>150A<br>>300 times |  |
| LDM302-201M | 200±20%               | 100                           | 100               | 0.8                               | 10KV/>3000A                     |                            |   |
| LDM302-301M | 300±20%               | 100                           | 100               | 0.8                               | 10KV/>3000A                     |                            |   |
| LDM302-401M | 400±20%               | 250                           | 100               | 0.8                               | 10KV/>3000A                     |                            |   |
| LDM302-501M | 500±20%               | 250                           | 100               | 0.8                               | 10KV/>3000A                     |                            |   |
| LDM302-701M | 700±20%               | 500                           | 100               | 0.8                               | 10KV/>3000A                     |                            |   |

### General Characteristics

No Radioactive Material  
 Storage Temperature: -55°C to +125°C  
 Operating Temperature: -55°C to +85°C  
 Body: Nickel Plated  
 Leads: Surface-mount, Axial Devices: Tin Plated  
 Devices with No Leads: Nickel Plated

### Packaging Information

| Part Number | Component package | Quantity | Packaging Option | Packaging Specification |
|-------------|-------------------|----------|------------------|-------------------------|
| LDM302      | 6.7*3.1           | 1500     | Tape&reel        |                         |



## Surface Mount >-LDM302-141N~701M Series

### Test Methods And Results

| ITEM                | TEST METHOD   | STANDARD   |
|---------------------|---|--|
| Static Life         | 10KV with 1500pf condenser is discharged through 2KΩ resistor. 200 times at an interval of 10sec.                     | Rate-of-change, within±30% insulation resistance & capacitance, conformed to rated spec. |
| Cold Resistance     | Measurement after -40°C/1000 HRS & normal temperature/2 HRS.  | Features are conformed to rated spec.  |
| Heat Resistance     | Measurement after 125°C/1000 HRS & normal temperature/2 HRS.  |  |
| Humidity Resistance | Measurement after humidity 90~95%(45°C)/1000 HRS & normal temperature/2 HRS.  |  |
| Temperature Cycle   | 10 times repetition of cycle -40°C/30min normal,temp/2 min →125°C/30min,measurement after normal temp/2 HRS.          |  |
| Solder Ability      | Apply flux and immerse in molten solder230±5°C for 3sec up to the point of 1.5mmFrom body. Check for solder adhesion. |  |
| Solder Heat         | Measurement after lead wire is dipped up to the point of 1.5mm from body into 260±5°C solder for 10sec.               | Conformed to rated spec.   |
| Pull Strength       | Apply 0.5kg load for 10sec.   | Lead shall not pull out or snap.   |
| Flexural Strength   | Bend lead wire at the point of 2mm from body under 0.25 load and back to its original point. Repeat 1 time.           |  |